



PRECISION BIOTECH OPTICS
From DNA SEQUENCING

BUY NOW

Edmund optics | worldwide

[About Us](#) | [Our Publications](#) | [Contact Us](#)

Explore Photonics.com

Enter search term

Entire Site

search

[XML](#) [RSS](#)

Register for a **FREE** account

| [Sign In](#)

[Home](#) | [News & Features](#) | [Products](#) | [News Briefs](#) | [Newsletter](#) | [Biophotonics](#) | [Calendar](#) | [Photonics Spectra](#) | [Buyers' Guide](#) | [Community Forum](#) | [Submit Releases](#)

- ▶ Photonics Spectra
- ▶ BioPhotonics
- ▶ EuroPhotonics
- ▶ Photonics Handbook
- ▶ photonics.com
 - ▼ 2009
 - ▶ [August](#)
 - ▶ July
 - ▶ June
 - ▶ May
 - ▶ April
 - ▶ March
 - ▶ February
 - ▶ January
 - ▶ 2008
 - ▶ 2007
 - ▶ 2006
 - ▶ 2005
 - ▶ 2004
 - ▶ 2003
 - ▶ 2002
 - ▶ 2001
 - ▶ 2000
 - ▶ 1999

Related Searches

[LEDs](#)
[lighting](#)
[displays](#)
[solid-state](#)

Most Popular Content

[Lab-Created Lithoparticles Could Have Many Uses](#)
[Light Changed to Matter, Then Stopped and Moved](#)
[Border Patrol Goes High Tech](#)
[Flexible Uses for Micro-LEDs](#)
['Spaser' Nanolaser Realized](#)

Community Forum

[optics job openings.](#)
[Optics,Pockels cell, Prism,Filter, high damaged coating.](#)
[laser range finder for mid-air avoidance](#)


▶ photonics.com ▶ 2009 ▶ August ▶ News and Features

[Email](#) [Print](#) [Save](#) [Discuss](#) [Digg](#) [Stumble](#) [Reddit](#) [Subscribe](#) [Advertise](#)

Flexible Uses for Micro-LEDs

CHAMPAIGN, Ill., Aug. 21, 2009 – By printing large arrays of ultrathin, ultrasmall inorganic LEDs and interconnecting them using thin-film processing, materials scientists have combined the advantages of both inorganic and organic LEDs for use in lighting and display systems with interesting properties, such as see-through construction and mechanical flexibility.

Applications for the arrays, which can be printed onto flat or flexible substrates ranging from glass to plastic and rubber, include general illumination, high-resolution home theater displays, wearable health monitors and biomedical imaging devices.

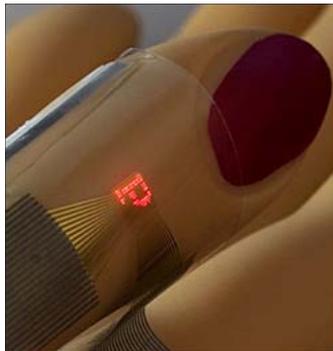

A micro-LED display printed on a thin sheet of plastic is wrapped around a finger. (Photos: D. Stevenson and C. Conway, Beckman Institute, University of Illinois)

"Our goal is to marry some of the advantages of inorganic LED technology with the scalability, ease of processing and resolution of organic LEDs," said John Rogers, the Flory-Founder chair professor of materials science and engineering at the University of Illinois.

Rogers and collaborators at the university, at Northwestern University, at the Institute of High Performance Computing in Singapore and at Tsinghua University in Beijing describe their work in the Aug. 21 issue of the journal *Science*.

Compared with organic LEDs, inorganic LEDs are brighter, more robust and longer-lived. Organic LEDs, however, are attractive because they can be formed on flexible substrates, in dense, interconnected arrays. The researchers' new technology combines features of both.

"By printing large arrays of ultrathin, ultrasmall inorganic LEDs and interconnecting them using thin-film processing, we can create general lighting and high-resolution display systems that otherwise could not be built with the conventional ways that inorganic LEDs are made, manipulated and assembled," Rogers said.

advertisement



In-stock and Available
PRECISION BIOTECH OPTICS

BUY NOW

Objectives

Edmund optics | worldwide

Copyright© Dennis Kinkel Microscopy INC.

[Thermo Optic Simulation for Switching using matlab](#)

[Recommendation: Rear Projection Mirrors](#)

Photonics Directory


[Home](#)

[Subscribe](#)

[Update your listing](#)

To overcome requirements on device size and thickness associated with conventional wafer dicing, packaging and wire bonding methods, the researchers developed epitaxial growth techniques for creating LEDs with sizes up to 100 times smaller than usual. They also developed printing processes for assembling these devices into arrays on stiff, flexible and stretchable substrates.

As part of the growth process, a sacrificial layer of material is embedded beneath the LEDs. When fabrication is completed, a wet chemical etchant removes this layer, leaving the LEDs undercut from the wafer, but still tethered at anchor points.

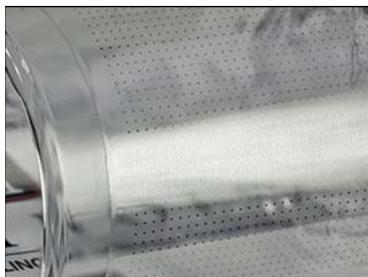

Array of micro-LEDs (black squares) printed onto a sheet of plastic, wrapped on a curved support with a university logo pattern in the background.

To create an array, a rubber stamp contacts the wafer surface at selected points, lifts off the LEDs at those points, and transfers them to the desired substrate.


“The stamping process provides a much faster alternative to the standard robotic ‘pick and place’ process that manipulates inorganic LEDs one at a time,” Rogers said. “The new approach can lift large numbers of small, thin LEDs from the wafer in one step, and then print them onto a substrate in another step.”

By shifting position and repeating the stamping process, LEDs can be transferred to other locations on the same substrate. In this fashion, large light panels and displays can be crafted from small LEDs made in dense arrays on a single, comparatively small wafer. And, because the LEDs can be placed far apart and still provide sufficient light output, the panels and displays can be nearly transparent. The thin device geometries allow the use of thin-film processing methods, rather than wire bonding, for interconnects.

Besides solid-state lighting, instrument panels and display systems, flexible and even stretchable sheets of printed LEDs can be achieved, with potential use in the health-care industry.

“Wrapping a stretchable sheet of tiny LEDs around the human body offers interesting opportunities in biomedicine and biotechnology,” Rogers said, “including applications in health monitoring, diagnostics and imaging.”

Besides Rogers, the U of I efforts included electrical and computer engineering professors Xiuling Li, an expert in epitaxial growth, and Kent Choquette, a leader in semiconductor optoelectronics. Mechanical science and engineering professor Placid Ferreira developed the printing-based manufacturing tools.

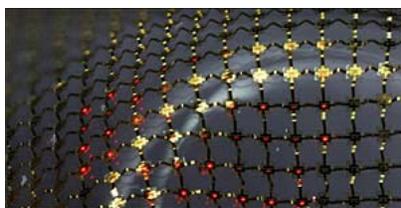

This stretchable micro-LED display consists of an interconnected mesh of printed micro-LEDs bonded to a rubber substrate.

Theoretical collaborators at Northwestern University, led by professor Younggang Huang, and at Tsinghua University, under the guidance of Younggang’s father, professor Keh-chih Hwang, supported the project through calculations of mechanical strains in the flexible and stretchable systems. Researchers at the Institute for High Performance Computing in Singapore provided finite-element studies of the same systems.

Rogers is affiliated with the Beckman Institute, the department of mechanical science and engineering, the Frederick Seitz Materials Research Laboratory, and the Micro and Nanotechnology Laboratory.

Ford Motor Co., the National Science Foundation and the Department of Energy funded the work.

For more information, visit: <http://illinois.edu>

More News and Features

[Headwall Awaits DoD Funding](#)

['Up-scale' NIR Spectrometry](#)

[FARO Cuts Work Force by 8%](#)

[Solar Conversion Record Set](#)

Article Discussion

To contribute to the discussion, you must be [logged in](#).

 Email  Print  Save  Discuss  Digg  Stumble  Reddit  Subscribe  Advertise

[Home](#) | [About Us](#) | [Advertising Info](#) | [News & Features](#) | [Photonics Spectra](#) | [Photonics Directory](#) | [Photonics Dictionary](#) | [Subscriptions](#) | [Contact Us](#) | [Top of Page](#)

Laurin Publishing provides comprehensive worldwide coverage of the photonics industry: optics, lasers, imaging, fiber optics, electro-optics, and photonic component manufacturing.

© 1996-2009 Laurin Publishing. All rights reserved.

Photonics.Com is Registered with the U.S. Patent & Trademark Office.

[Privacy Policy](#) | [Terms and Conditions of Use](#)
Reproduction in whole or in part without permission is prohibited.
webmaster@laurin.com